



HPL/WORKTOPS/TABLES



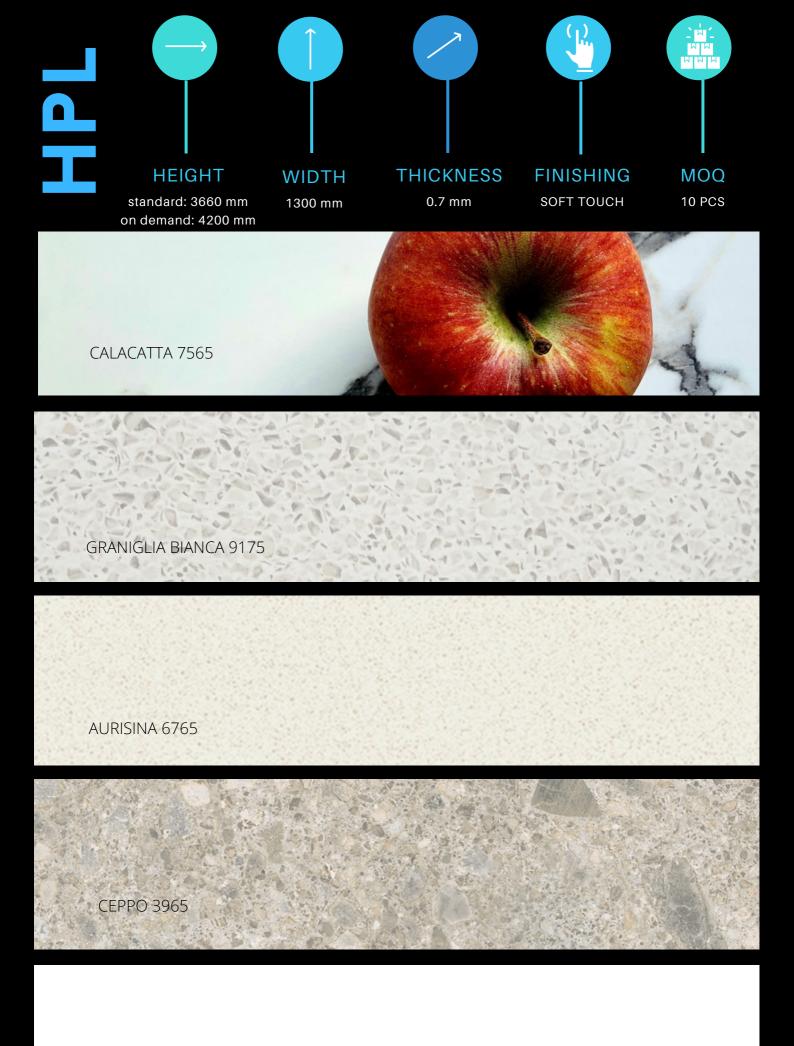

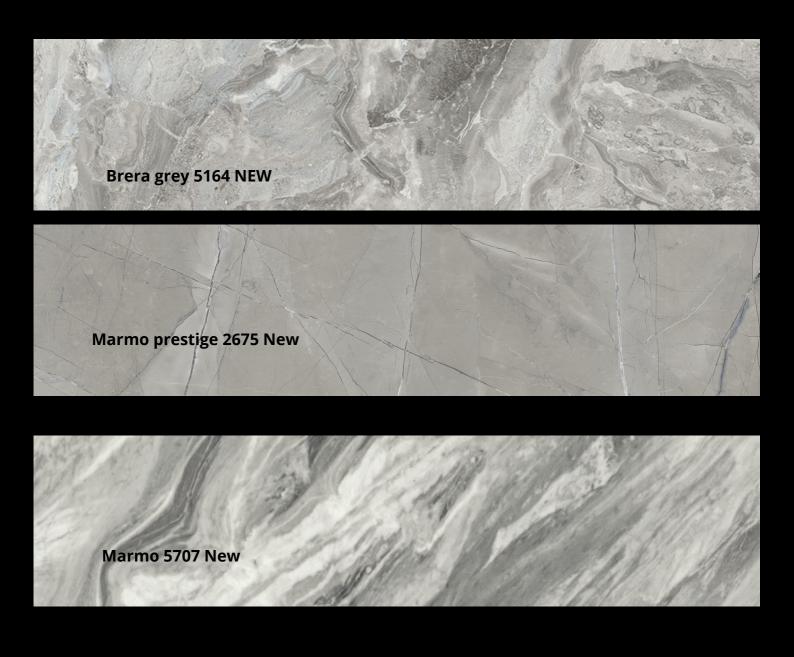

TECHNICAL DATA SHEET:



SURFACE QUALITY

EN 438-2 Section 4 Dirt, Spots and similar surface defects ≤2 mm2/m2 Fibers, Hairs and scratches ≤ 20 mm/m2



WEAR RESISTANCE

EN 438-2 Section 10 HGS, HGP

Printed Decors

Plain Colors

IP = 588 Rev.

IP = 378 Rev.



SCRATCH RESISTANCE

EN 438-2 Section 25 HGS, HGP
Printed Decors 2 N
Plain Colors 2 N




DETERMINATION OF MICRO SCRATCH RESISTANCE

EN 438-2 Section 30

Procedure B on Printed Class 4 - 5

Procedure B on Plain Color Class 4 - 5



RESISTANCE TO STAINING

EN 438-2 Section 26 HGS, HGP

Group 1 & 2

Group 3

4



LIGHT FASTNESS (XENON ARC)

EN 438-2 Section 27 HGS, HGP

WORKTOP OPTIONS:

PREFOLDING - Y2










lower radius



greater impact resistance



no orange peel effect

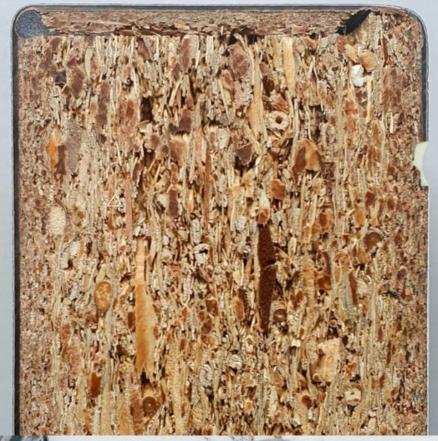



SUGGESTED:






on demand: 4200 mm








THICKNESS
38 mm



FINISHING MOQ SOFT TOUCH 20 PCS

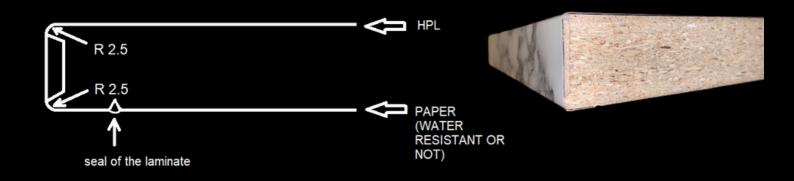







CLEANING INSTRUCTION:





WATER

Food liquid stuff: fruit juice, alcohol liquor, wine, milk, tea, coffee, fruit jam, chocolate syrup, maple syrup, soya sauce, liquid soap + Animal stuff: animal fat, dry blood, eggs



SOAP

Liquid fat including: cooking oil, olive oil, grease, hydraulic oil, engine oil, castor oil



ALCOHOL

Cosmetic stuff: hair spray, foundation and greasy face powder, nail polish + Adhesive sruff: vegetal adhesive, vinyl adhesive, contact adhesive, PU adhesive, neoprene adhesive, acrylic adhesive, white PVAc adhesive, silicone adhesive + Paints stuff: acrylic markers, Ink, colours paints, markers, synthetic oil paints, spray paints, graffiti paints



VINEGAR

500gr of food grade vinegar + 500 gr of tap water to remove the Calcium Marks





www.toplinea.com